

AURA[®] 150 Metalized High Intensity Prismatic Grade Pre-Stripe Barricade Sheeting

Product Code: 0150

Product Data Bulletin

Product Overview

Aura Optical Systems' AURA[®] 150 Metalized High Intensity Prismatic Grade Pre-Stripe Barricade Sheeting is a microprismatic retroreflective sheeting designed for use on construction work zone barricades, delineators, and other work zone devices.

Key Features


- Metalized, single-ply construction to prevent edge-lifting or delamination
- Aggressive high-tack adhesive for bonding to low surface energy plastics and other substrates[†]
- Durable, all acrylic construction
- Excellent levels of retroreflection from multiple viewing angles
- Retains retroreflectivity when wet

Color Availability

Product Code	Color
0150-4R	4" Right, Orange / White Stripe
0150-4L	4" Left, Orange / White Stripe
0150-6R	6" Right, Orange / White Stripe
0150-6L	6" Left, Orange / White Stripe

"Right" sheetings have stripes that slope from the upper-right to the lower-left as shown in the diagram below. "Left" sheetings are the opposite.

Figure 1: Diagram of "Right" Sheeting

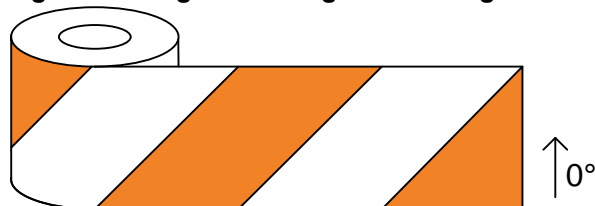

Physical Characteristics & Properties

Durability	Up to 3-years when properly installed. Vertical exposure only.
Retroreflective Elements	Microprisms, metalized with vacuum-deposited aluminum
Tape Thickness	12 mils, excluding release liner
Release Liner	HDPE Release Liner
Adhesive	Aggressive high-tack adhesive for bonding to low surface energy plastics, aluminum and wood. [†]
Application Temperature	15°C (60°F) minimum

[†] Optional standard tack adhesive is also available.

Retroreflection

AURA[®] 150 Pre-Stripe Barricade Sheeting will yield the optimal levels of reflectivity when oriented in a horizontal position as shown in Figure 1.

Typical Coefficient of Retroreflection for Horizontal Positioning. Measured at 0° Rotation (cd/lx/m²)

Color	Observation Angle	Entrance Angle	
		-4°	30°
White	0.2°	550	425
	0.5°	140	100
	1.0°	20	12
Orange	0.2°	220	170
	0.5°	55	40
	1.0°	8	5

Minimum Coefficient of Retroreflection when Measured per ASTM E-810. Average of 0° and 90° Rotations. (cd/lx/m²)

Color	Observation Angle	Entrance Angle	
		-4°	30°
White	0.2°	360	170
	0.5°	95	65
	1.0°	10	6
Orange	0.2°	145	68
	0.5°	30	25
	1.0°	4	2.5



Aura Optical Systems, L.P.

7415 Whitehall, Suite 111

Ft. Worth, Texas 76118 U.S.A.

General / International Inquires: +1 (801) 668-3439

USA Sales Inquiries: +1 (682) 227-1208

www.auraopticalsystems.com

Daytime Color

AURA® 150 Pre-Stripe Barricade Sheeting will typically have the daytime color listed below and shall fall within the color boundaries identified below by four pairs of chromaticity coordinates (CIE 1931 Standard Colorimetric System) when measured with Standard Illuminant D65 using a 0/45 (45/0) geometry instrument.

Typical Daytime Color:

	x	y	Cap Y%
White	0.305 +/- 0.01	0.325 +/- 0.01	29.5 +/- 1.0
Orange	0.575 +/- 0.01	0.400 +/- 0.01	11.8 +/- 1.0

Color Boundaries:

Color	1		2		3		4		Cap Y%	
	x	y	x	y	x	y	x	y	Min	Max
White	.303	.300	.368	.366	.340	.393	.274	.329	27	--
Orange	.558	.352	.636	.364	.570	.429	.506	.404	10	30

Application Guidelines

AURA® 150 should be conditioned above 15°C (60°F) for at least 24-hours prior to application. Application should occur using a squeeze roll applicator or by hand using a firm rubber roller or plastic squeegee. Substrates should be cleaned prior to application. Wipe surfaces with rubbing alcohol (or similar solvent cleaner) and allow the surface to completely dry prior to application. Wet application method is NOT recommended.

For application to plastic substrates, especially low surface energy plastics, it is important to flame treat (or otherwise surface treat) the plastic substrate prior to application. Although AURA® 150 is supplied with an aggressive high-tack adhesive designed for many plastics, it should be noted that all plastics are different. Many plastics, including fiberglass laminates, may contain ingredients or components that may migrate to the surface and adversely affect the adhesion or performance of the reflective sheeting. Similarly, the adhesive of AURA® 150 contains components that could potentially migrate into the plastic substrate. The user should always test the performance of AURA® 150 on their specific substrate.

Storage


Store in a cool, dry area. Use within 1-year of receipt of the product.

Warranty Information

The information, technical data, and statements made herein are believed to be reliable, but the accuracy or completeness thereof is not guaranteed and should not be construed as a warranty or representation for which Aura Optical Systems assumes legal responsibility. All Aura Optical Systems products are sold with the understanding that the Purchaser has independently determined the suitability of such products for its purposes.

*The following is made in lieu of all other express or implied warranties. **No implied warranty of merchantability or fitness for a particular purpose is made.*** Aura Optical Systems products are warranted to be free from defects in material or workmanship for a period of one year from date of shipment if the product is properly stored and/or applied. Aura Optical Systems' sole obligation shall be to replace such quantity of product proven to be defective. Aura Optical Systems shall not be liable for any injury, loss or damage, direct or consequential, whether foreseeable or not, arising out of the use or of the inability to use the product.

Trademarks

AURA®, the Aura Optical Systems logo, and the  symbol are registered trademarks of Aura Optical Systems, L.P., U.S.A.



Aura Optical Systems, L.P.

7415 Whitehall, Suite 111
 Ft. Worth, Texas 76118 U.S.A.
 General / International Inquires: +1 (801) 668-3439
 USA Sales Inquiries: +1 (682) 227-1208
www.auraopticalsystems.com